



DANFORE LIGHTING

SMD SPOT LIGHTS SERIES PRODUCTS CATALOG



TEL:86-755-22214820




FAX:86-755-22218271

WEB:www.ledlightingexporter.com

ADD:Mingjun Commercial Center, No. 1 Langrong Rd, Dalang, Longhua, Bao'an District, Shenzhen city, Guangdong, China 518109 CHN



SMD SPOTLIGHTS SERIES

Model:	DF-MR11-6SMD5050A	DF-MR11-6SMD5050B	DF-MR11-10SMD5050A	DFMR11-10SMD5050B	DF-MR16-21SMD5050A	DF-MR16-21SMD5050B	DF-MR16-60SMD3528A
Pic:							
Power:	1.2W	1.2W	2W	2W	3W	3W	3W
LED Qty :	6PCS	6PCS	10PCS	10PCS	21PCS	13-15LM/LED	60PCS
LED Luminous Flux:	18-20LM/LED	13-15LM/LED	18-20LM/LED	13-15LM/LED	18-20LM/LED	18-20LM/LED	6-7LM/LED
Working Voltage:	AC/DC12V	AC/DC12V	AC/DC12V	AC/DC12V	AC/DC12V	AC/DC12V	AC/DC12V
Size:	35*34mm	35*34mm	35*34mm	35*34mm	50*44mm	50*44mm	50*44mm
Color:	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White
Color Temperature:	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K
Bulb Luminous Flux:	80-90lm	60-70lm	135-145lm	85-95lm	285-295lm	170-180lm	285LM
Power Factor:	>0.7	>0.7	>0.7	>0.7	>0.7	>0.7	>0.7
CRI:	≥70	≥70	≥70	≥70	≥70	≥70	≥70
Beam Angle:	120°	120°	120°	120°	120°	120°	120°
Life:	50000H	50000H	50000H	50000H	50000H	50000H	50000H
Operating Temperature:	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C
Base:	G5.3	G5.3	G5.3	G5.3	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22
Warranty:	2 years	2 years	2 years	2 years	2 years	2 years	2 years
Protection Degree:	IP20						
Certificates:	CE ROHS						
Place of Origin:	Shenzhen, China						

Model:	DF-MR16-60SMD3528B	DF-MR16-24SMD5050A	DF-MR16-24SMD5050B	DF-MR16-24SMD5050CA	DF-MR16-24SMD5050CB	DF-GU10-38SMD3528A	DF-GU10-38SMD3528B
Pic:							
Power:	3W	5W	5W	4W	4W	2W	2W
LED Qty :	60PCS	24PCS	24PCS	24PCS	24PCS	38PCS	38PCS
LED Luminous Flux:	4-4.5LM/LED	18-20LM/LED	13-15LM/LED	18-20LM/LED	13-15LM/LED	6-7LM/LED	4-4.5LM/LED
Working Voltage:	AC/DC12V	AC/DC12V	AC/DC12V	AC/DC12V	AC/DC12V	AC 110-240V	AC 110-240V
Size:	50*44mm	50*44mm	50*44mm	50*44mm	50*44mm	50*52.5mm	50*52.5mm
Color:	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White
Color Temperature:	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K
Bulb Luminous Flux:	180LM	360-380LM	250-270LM	320-340LM	230-240LM	180lm	105lm
Power Factor:	>0.7	>0.7	>0.7	>0.7	>0.7	>0.7	>0.7
CRI:	≥70	≥70	≥70	≥70	≥70	≥70	≥70
Beam Angle:	120°	120°	120°	120°	120°	120°	120°
Life:	50000H	50000H	50000H	50000H	50000H	50000H	50000H
Operating Temperature:	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C
Base:	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22
Warranty:	2 years	2 years	2 years	2 years	2 years	2 years	2 years
Protection Degree:	IP20						
Certificates:	CE ROHS						
Place of Origin:	Shenzhen, China						




Model:	DF-GU10-12SMD5050CA	DF-GU10-12SMD5050CB	DF-GU10-21SMD5050CA	DF-GU10-21SMD5050CB	DF-GU10-24SMD5050A	DF-GU10-24SMD5050B	DF-GU10-20SMD5050A
Pic:							
Power:	2W	2W	3W	3W	4W	4W	3.5 W
LED Qty :	21PCS	21PCS	21PCS	21PCS	24PCS	24PCS	20PCS
LED Luminous Flux:	18-20LM/LED	13-15LM/LED	18-20LM/LED	13-15LM/LED	18-20LM/LED	13-15LM/LED	18-20LM/LED
Working Voltage:	AC 110-240V	AC 110-240V	AC 110-240V	AC 110-240V	AC 110-240V	AC 110-240V	AC 110-240V
Size:	50*52.5mm	50*52.5mm	50*75mm	50*75mm	50*52.5mm	50*52.5mm	50*52.5mm
Color:	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White
Color Temperature:	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K
Bulb Luminous Flux:	160-180LM	130-140LM	310-320LM	170-180LM	360-380LM	250-270LM	360-380LM
Power Factor:	>0.7	>0.7	>0.7	>0.7	>0.7	>0.7	>0.7
CRI:	≥70	≥70	≥70	≥70	≥70	≥70	≥70
Beam Angle:	120°	120°	120°	120°	120°	120°	120°
Life:	50000H	50000H	50000H	50000H	50000H	50000H	50000H
Operating Temperature:	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C
Base:	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22
Warranty:	2 years	2 years	2 years	2 years	2 years	2 years	2 years
Protection Degree:	IP20						
Certificates:	CE ROHS						
Place of Origin:	Shenzhen, China						

Model:	DF-GU10-20SMD5050B	DF-GU10-24SMD5050A	DF-GU10-24SMD5050B	DF-GU10-27SMD5050A	DF-GU10-27SMD5050B	DF-E27-48SMD3528A	DF-E27-48SMD3528B
Pic:							
Power:	3.5W	4.5W	4.5W	5W	5W	2.5W	2.5W
LED Qty :	20PCS	24PCS	24PCS	27PCS	27PCS	48PCS	48PCS
LED Luminous Flux:	13-15LM/LED	18-20LM/LED	13-15LM/LED	18-20LM/LED	13-15LM/LED	6-7LM/LED	4-4.5LM/LED
Working Voltage:	AC 110-240V	AC 110-240V	AC 110-240V	AC 110-240V	AC 110-240V	AC 110-240V	AC 110-240V
Size:	50*52.5mm	50*52.5mm	50*52.5mm	50*52.5mm	50*52.5mm	50*50mm	50*50mm
Color:	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White
Color Temperature:	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K
Bulb Luminous Flux:	250-270LM	360-380LM	250-270LM	360-380LM	250-270LM	240lm	140lm
Power Factor:	>0.7	>0.7	>0.7	>0.7	>0.7	>0.7	>0.7
CRI:	≥70	≥70	≥70	≥70	≥70	≥70	≥70
Beam Angle:	120°	120°	120°	120°	120°	120°	120°
Life:	50000H	50000H	50000H	50000H	50000H	50000H	50000H
Operating Temperature:	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C
Base:	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22
Warranty:	2 years	2 years	2 years	2 years	2 years	2 years	2 years
Protection Degree:	IP20						
Certificates:	CE ROHS						
Place of Origin:	Shenzhen, China						



Model:	DF-E27-27SMD5050A	DF-E27-27SMD5050B	DF-E27-60SMD3528A	DF-E27-60SMD3528B	DF-E27-21SMD5050A	DF-E27-21SMD5050B	DF-PAR38-70SMD5050A
Pic:							
Power:	5W	5W	3W	3W	3W	3W	15W
LED Qty :	27PCS	27PCS	60PCS	60PCS	21PCS	21PCS	70PCS
LED Luminous Flux:	18-20LM/LED	13-15LM/LED	6-7LM/LED	4-4.5LM/LED	18-20LM/LED	13-15LM/LED	18-20LM/LED
Working Voltage:	AC 110-240V	AC 110-240V	AC 110-240V	AC 110-240V	AC 110-240V	AC 110-240V	AC 110-240V
Size:	63*75mm	63*75mm	50*75mm	50*75mm	50*75mm	50*75mm	121.5*122mm
Color:	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White	Warm White/Cool White
Color Temperature:	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K	2800K-3000K/6000K-7000K
Bulb Luminous Flux:	390-420LM	280-290LM	300lm	190lm	310-320LM	170-180LM	1200-1300LM
Power Factor:	>0.7	>0.7	>0.7	>0.7	>0.7	>0.7	>0.7
CRI:	≥70	≥70	≥70	≥70	≥70	≥70	≥70
Beam Angle:	120°	120°	120°	120°	120°	120°	120°
Life:	50000H	50000H	50000H	50000H	50000H	50000H	50000H
Operating Temperature:	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C	-25 to 45 °C
Base:	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22	G5.3/GU10/E14/E27/B22
Warranty:	2 years	2 years	2 years	2 years	2 years	2 years	2 years
Protection Degree:	IP20						
Certificates:	CE ROHS						
Place of Origin:	Shenzhen, China						

Model:	DF-PAR38-70SMD5050B
Pic:	
Power:	15W
LED Qty :	70PCS
LED Luminous Flux:	13-15LM/LED
Working Voltage:	AC 110-240V
Size:	121.5*122mm
Color:	Warm White/Cool White
Color Temperature:	2800K-3000K/6000K-7000K
Bulb Luminous Flux:	900-1000LM
Power Factor:	>0.7
CRI:	≥70
Beam Angle:	120°
Life:	50000H
Operating Temperature:	-25 to 45 °C
Base:	G5.3/GU10/E14/E27/B22
Warranty:	2 years
Protection Degree:	IP20
Certificates:	CE ROHS
Place of Origin:	Shenzhen, China

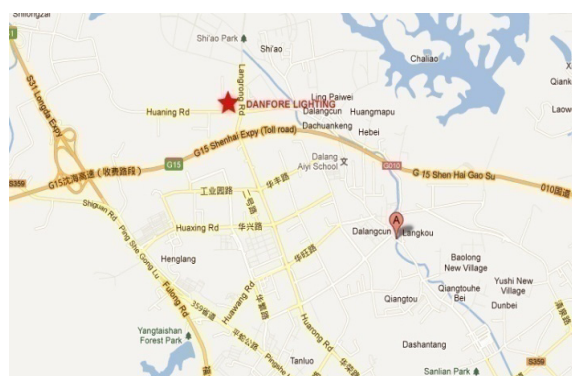

ADD: Mingjun Commercial Center, No. 1
Langrong Rd, Dalang, Longhua, Bao'an
District, Shenzhen city, Guangdong, China

518109 CHN

E-mail: essie@danforelighting.com

TEL: 86-755-22214820
FAX: 86-755-22218271
MOBILE: 86-13590324017

WEBSITE: www.ledlightingexporter.com

